


深沟球-带密封圈宽内圈轴承

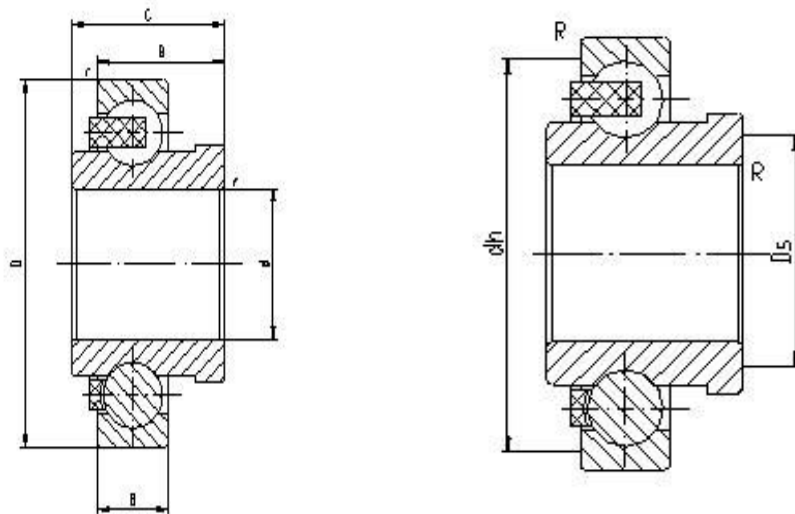

基本尺寸					基本额定载荷		极限转速	轴承代号	安装相关尺寸				重量
d	D	B	C	rsmin	Cr	Cor	脂润滑		Dsmin	Dsmax	dhmax	Rmax	
25	65	18	17	1.1	25	13.9	7000	6605WB1-2RS/P63-SAGW	31		59	1	0.27
26	68	21.5	14.5	1	31	17	6500	6605X2WB1TN1/HA	32		62	1	0.272
30	59	13	22	0.4	10	8	11000	1-0005	34		55	0.4	0.191
30	59	13	22	0.4	10	8	11000	1-0005ZC	34		55	0.4	0.307
32	72	25	19	0.5	26.7	15	9000	66/32WB1-2RSZ/C9	36.5		67.5	0.5	0.408
40	80	27	21	1.1	29.1	17.9	8500	62208X2WB-2RS/P53	46		74	1	0.525
40	94	26	31	1.5	41	24	7500	6308X3WB1TN1-2RS/YA6	48		86	1.5	0.817
40	100	23	36	2	41	24	7000	6308/YAD	46		91	2	1.36
40.5	62	34	12	0.5	11.7	9	9300	1-0004	45		57.5	0.5	0.16
45	85	27	21	1.1	29.3	19.5	7500	62209X2WB-2RS/P53	51		79	1	0.544
50	129	27	34	2.5	62	38	4100	CZ5012934-2RS	61		118	2.5	2.09
55	100	55.6	25	1.5	33.5	25.1	4300	62211WB-2RSZN	63		92	1.5	1.08
55	151	33	45	4	55	46	3600	CZ5515145-2RS	71		135	3	3.94
55	90	18		1.1	26.7	18.4	4500	6011-2RS	61		84	1	0.389
55	100	21		1.5	43.5	28.8	4300	6211-2RS	63		92	1.5	0.594
60	110	65.1	27	1.5	40.5	36	5500	1-0001	68		102	1.5	1.35
60	179	31	45	2.5	63	53	3400	CZ6017945-2RS	71		168	2.5	6.1
600	700	100	50	4	260	710	205	D66/600	616		684	3	60.6

63.5	99.5	29	19.4	1.5	26.5	35.1	4100	76TM6429	73		90	1.5	0.603
76.4	130	33.3	30.2	0.762	66	60	3000	66/76X4WB1- 2RZ/YA3	85		125	0.762	1.46