


双密封双列满装圆柱滚子轴承NNF

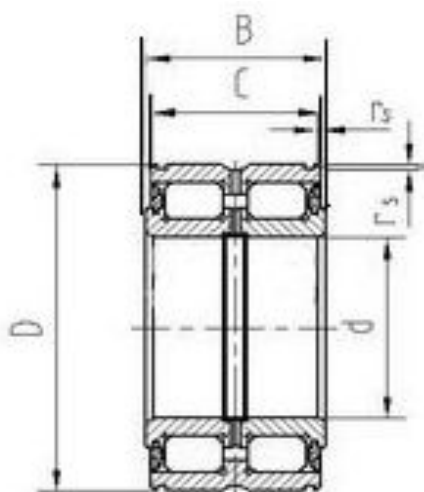

外形尺寸 (mm)					额定负荷 (kN)		极限转速 (r/min)*	重量 (Kg)	轴承代号	
d	D	C	B	rs min	Cr	Cor			STON	INA
20	42	29	30	0.3	40.2	52	3600	0.21	NNF5004-2LSNVY	SL045004PPX
25	47	29	30	0.3	44.6	62	3000	0.23	NNF5005-2LSNVY	SL045005PPX
30	55	33	34	0.3	52.8	75	2600	0.35	NNF5006-2LSNVY	SL045006PPX
35	62	35	36	0.3	66	91.5	2200	0.45	NNF5007-2LSNVY	SL045007PPX
40	68	37	38	0.6	79	116	2000	0.53	NNF5008-2LSNVY	SL045008PPX
45	75	39	40	0.6	95	146	1880	0.68	NNF5009-2LSNVY	SL045009PPX
50	80	39	40	0.6	101	160	1700	0.73	NNF5010-2LSNVY	SL045010PPX
55	90	45	46	0.6	119	193	1500	1.1	NNF5011-2LSNVY	SL045011PPX
60	95	45	46	0.6	123	208	1400	1.2	NNF5012-2LSNVY	SL045012PPX
65	100	45	46	0.6	128	224	1300	1.3	NNF5013-2LSNVY	SL045013PPX
70	110	53	54	0.6	190	325	1200	1.85	NNF5014-2LSNVY	SL045014PPX
75	115	53	54	0.6	201	355	1100	2	NNF5015-2LSNVY	SL045015PPX
80	125	59	60	0.6	233	415	1000	2.7	NNF5016-2LSNVY	SL045016PPX
85	130	59	60	0.6	251	430	1000	2.75	NNF5017-2LSNVY	SL045017PPX
90	140	66	67	0.6	297	550	900	3.8	NNF5018-2LSNVY	SL045018PPX
95	145	66	67	0.6	303	570	900	3.95	NNF5019-2LSNVY	SL045019PPX
100	150	66	67	0.6	308	570	850	4.05	NNF5020-2LSNVY	SL045020PPX
110	170	79	80	0.6	380	695	750	6.45	NNF5022-2LSNVY	SL045022PPX
120	180	79	80	0.6	402	750	700	6.9	NNF5024-2LSNVY	SL045024PPX
130	200	94	95	0.6	572	1040	630	10.5	NNF5026-2LSNVY	SL045026PPX
140	210	94	95	0.6	594	1120	600	11	NNF5028-2LSNVY	SL045028PPX
150	225	99	100	0.6	693	1290	560	13.5	NNF5030-2LSNVY	SL045030PPX
160	240	108	109	0.6	721	1400	500	16.5	NNF5032-2LSNVY	SL045032PPX
170	260	121	122	0.6	935	1800	480	22.5	NNF5034-2LSNVY	SL045034PPX
180	280	135	136	0.6	1080	2120	450	30	NNF5036-2LSNVY	SL045036PPX

190	290	135	136	0.6	1100	2200	430	31.5	NNF5038-2LSNVY	SL045038PPX
200	310	149	150	0.6	1340	2900	400	42	NNF5040-2LSNVY	SL045040PPX
220	340	159	160	1	1510	3100	360	53.5	NNF5044-2LSNVY	SL045044PPX
240	360	159	160	1	1570	3350	340	57.5	NNF5048-2LSNVY	SL045048PPX

注： *表列为油润滑数值, 脂润滑为表列数值50%。