


三列满装圆柱滚子轴承3NCF

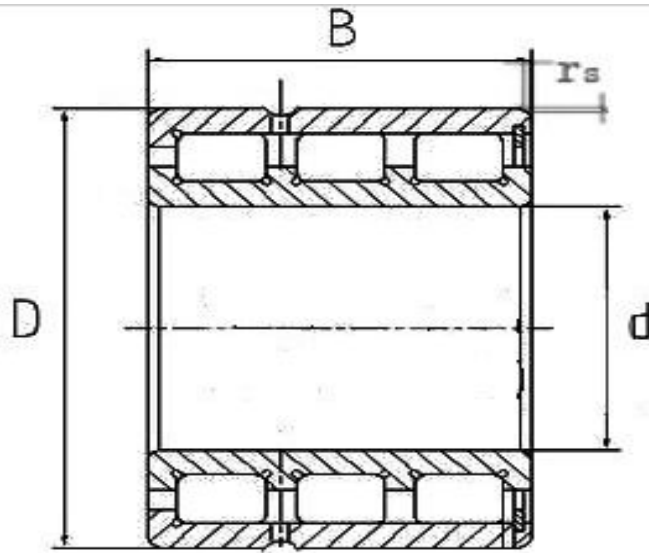

外形尺寸 (mm)				额定负荷 (kN)		极限转速 (r/min)*	重量 (Kg)	轴承代号	
d	D	B	rsmin	Cr	Cor			STON	INA
30	47	30	0.3	42	80	6500	0.16	3NCF6906V	SL14906
35	55	32	0.6	53	94	5500	0.28	3NCF6907VX2	SL14907
		44	0.6	84	170	5500	0.41	3NCF6907VX2	F-91443
40	62	32	0.6	63	107	5000	0.4	3NCF5908VX2	SL14908
45	68	36	0.6	80	160	4600	0.48	3NCF6909VX2	SL14909
50	72	36	0.6	84	165	4300	0.52	3NCF6910VX2	SL14910
55	80	36	1	97	199	3700	0.71	3NCF5911VX2	SL14911
60	85	40	1	102	216	3500	0.73	3NCF6912VX2	SL14912
65	90	44	1	124	250	3200	1.08	3NCF6913VX2	SL14913
70	100	44	1	142	265	3200	1.1	3NCF5914VX2	SL14914
80	110	44	1	150	300	2900	1.25	3NCF5916VX2	SL14916
90	125	52	1.1	205	425	2500	1.95	3NCF5918VX2	SL14918
100	140	59	1.1	260	550	2200	2.85	3NCF5920VX2	SL14920
110	150	59	1.1	270	600	2100	3.1	3NCF5922VX2	SL14922
120	165	66	1.1	305	660	1900	4.2	3NCF5924VX2	SL14924
130	180	73	1.5	355	770	1700	5.6	3NCF5926VX2	SL14926
140	190	73	1.5	370	830	1600	6	3NCF5928VX2	SL14928
150	210	88	2	560	1230	1500	9.5	3NCF5930VX2	SL14930
160	220	88	2	580	1330	1400	10	3NCF5932VX2	SL14932
170	230	88	2	600	1390	1300	10.5	3NCF5934VX2	SL14934

180	250	101	2	780	1810	1300	15.5	3NCF5936VX2	SL14936
190	260	101	2	800	1900	1200	16.2	3NCF5938VX2	SL14938
200	280	116	2.1	940	2220	1100	22.4	3NCF5940VX2	SL14940

注： *表列为油润滑数值, 脂润滑为表列数值50%。