


单列满装圆柱滚子轴承

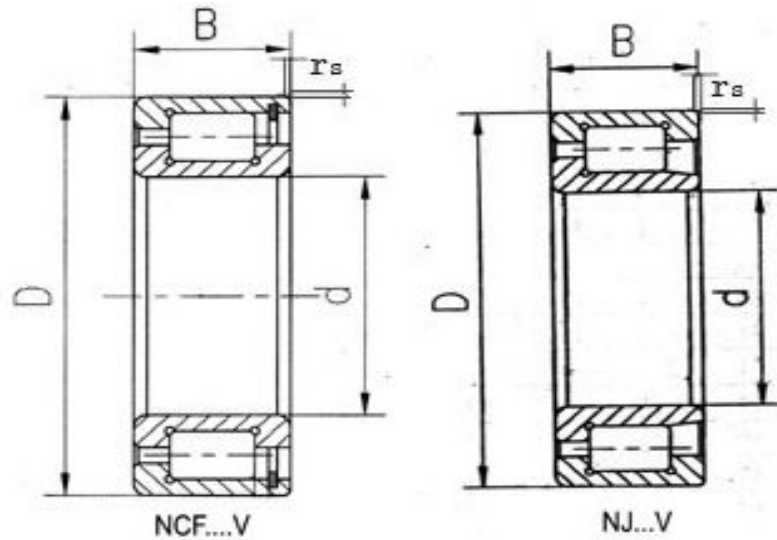

外形尺寸 (mm)				额定负荷 (kN)		极限转速 (r/min)*	重量 (Kg)	轴承代号	
d	D	B	rs min	Cr	Cor			STON	INA
20	42	16	0.6	27.5	26.5	9000	0.11	NCF3004V	SL183004
20	47	18	1	41	37.5	7000	0.16	NCF2204V	SL182204
25	47	16	0.6	31.5	32.5	7500	0.12	NCF3005V	SL183005
25	52	18	1	46	45	6000	0.18	NCF2205V	SL182205
25	62	24	1.1	63	57	4500	0.37	NJ2305V	SL192305
30	55	19	1	40.5	43	6500	0.2	NCF3006V	SL183006
30	62	20	1	61	63	5000	0.3	NCF2206V	SL182206
30	72	27	1.1	87	85	3800	0.56	NJ2306V	SL192306
35	62	20	1	49.5	55	5500	0.26	NCF3007V	SL183007
35	72	23	1.1	76	77	4300	0.44	NCF2207V	SL182207
35	80	31	1.5	113	112	3400	0.74	NJ2307V	SL192307
40	68	21	1	59	68	5000	0.31	NCF3008V	SL183008
40	80	23	1.1	84	89	3800	0.55	NCF2208V	SL182208
40	90	33	1.5	152	155	3000	1.01	NJ2308V	SL192308
45	75	23	1	63	76	4600	0.4	NCF3009V	SL183009
45	85	23	1.1	88	96	3600	0.59	NCF2209V	SL182209
45	100	36	1.5	162	165	2700	1.37	NJ2309V	SL192309
50	80	23	1	77	92	4300	0.43	NCF3010V	SL183010
50	90	23	1.1	95	109	3300	0.64	NCF2210V	SL182210
50	110	40	2	205	215	2500	1.81	NJ2310V	SL192310
55	90	26	1.1	105	134	3700	0.64	NCF3011V	SL183011
55	100	25	1.5	122	145	3000	0.87	NCF2211V	SL182211
55	120	43	2	242	255	2300	2.28	NJ2311V	SL192311

60	85	16	1	54	74	3800	0.29	NCF2912V	SL182912
60	95	26	1.1	108	141	3500	0.69	NCF3012V	SL183012
60	110	28	1.5	152	179	2700	1.18	NCF2212V	SL182212
60	130	46	2.1	260	280	2100	2.88	NJ2312V	SL192312
65	90	16	1	57	81	3500	0.31	NCF2913V	SL182913
65	100	26	1.1	113	154	3200	0.73	NCF3013V	SL183013
65	120	31	1.5	177	213	2500	1.57	NCF2213V	SL182213
65	140	48	2.1	315	355	1900	3.52	NJ2313V	SL192313
70	100	19	1	76	108	3200	0.49	NCF2914V	SL182914
70	110	30	1.1	134	171	3100	1.02	NCF3014V	SL183014
70	125	31	1.5	183	226	2400	1.66	NCF2214V	SL182214
70	150	51	2.1	345	390	1800	4.33	NJ2314V	SL192314
75	105	19	1	78	116	3000	0.52	NCF2915V	SL182915
75	115	30	1.1	141	188	2800	1.06	NCF3015V	SL183015
75	130	31	1.5	190	239	2300	1.75	NCF2215V	SL182215
75	160	55	2.1	410	475	1700	5.3	NJ2315V	SL192315
80	110	19	1	81	123	2900	0.55	NCF2916V	SL182916
80	125	34	1.1	173	224	2600	1.43	NCF3016V	SL183016
80	140	33	2	223	280	2100	2.15	NCF2216V	SL182216
80	170	58	2.1	480	560	1600	6.32	NJ2316V	SL192316
85	120	22	1.1	102	155	2700	0.81	NCF2917V	SL182917
85	130	34	1.1	178	235	2500	1.51	NCF3017V	SL183017
85	150	36	2	255	320	2000	2.74	NCF2217V	SL182217
85	180	60	3	510	620	1500	7.34	NJ2317V	SL192317
90	125	22	1.1	106	165	2500	0.84	NCF2918V	SL182918
90	140	37	1.5	207	280	2300	1.97	NCF3018V	SL183018
90	160	40	2	285	365	1900	3.48	NCF2218V	SL182218
90	190	64	3	560	660	1400	8.83	NJ2318V	SL192318
95	130	22	1.1	114	172	2400	0.86	NCF2919V	SL182919
95	170	43	2.1	335	430	1700	4.17	NCF2219V	SL182219
95	200	67	3	580	720	1350	10.2	NJ2319V	SL192319
100	140	24	1.1	132	199	2300	1.14	NCF2920V	SL182920
100	150	37	1.5	218	305	2200	2.15	NCF3020V	SL183020
100	180	46	2.1	390	520	1600	5.13	NCF2220V	SL182220
100	215	73	3	710	860	1300	13	NJ2320V	SL192320
110	150	24	1.1	137	213	2100	1.23	NCF2922V	SL182922
110	170	45	2	285	395	2000	3.5	NCF3022V	SL183022
110	200	53	2.1	455	590	1500	7.24	NCF2222V	SL182222
110	240	80	3	840	970	1150	17	NJ2322V	SL192322
120	165	27	1.1	176	285	1900	1.73	NCF2924V	SL182924
120	180	46	2	300	435	1800	3.8	NCF3024V	SL183024
120	215	58	2.1	530	730	1400	9.08	NCF2224V	SL182224
120	260	86	3	990	1220	1050	22.3	NJ2324V	SL192324
130	180	30	1.5	210	350	1800	2.33	NCF2926V	SL182926
130	200	52	2	430	610	1700	5.65	NCF3026V	SL183026
130	230	64	3	630	860	1300	11.25	NCF2226V	SL182226
140	190	30	1.5	228	375	1600	2.42	NCF2928V	SL182928

140	210	53	2	455	670	1500	6.04	NCF3028V	SL183028
140	250	68	3	720	1020	1200	14.17	NCF2228V	SL182228
150	210	36	2	455	670	1500	3.77	NCF2930V	SL182930
150	225	56	2.1	475	700	1500	7.33	NCF3030V	SL183030
150	270	73	3	830	1180	1100	18.43	NCF2230V	SL182230
160	220	36	2	320	520	1400	4	NCF2932V	SL182932
160	240	60	2.1	540	810	1400	8.8	NCF3032V	SL183032
160	290	80	3	1020	1460	1000	23	NCF2232V	SL182232
170	230	36	2	330	560	1300	4.3	NCF2934V	SL182934
170	260	67	2.1	710	1070	1300	12.2	NCF3034V	SL183034
170	310	86	4	1140	1660	950	28.65	NCF2234V	SL182234
180	250	42	2	410	690	1300	6.2	NCF2936V	SL182936
180	280	74	2.1	820	1260	1200	16.1	NCF3036V	SL183036
180	320	86	4	1180	1760	900	29.8	NCF2236V	SL182236
190	260	42	2	455	790	1200	6.5	NCF2938V	SL182938
190	290	75	2.1	840	1320	1100	17	NCF3038V	SL183038
190	340	92	4	1300	1900	850	35.65	NCF2238V	SL182238
200	250	24	1.5	178	320	1200	2.57	NCF1840V	SL181840
200	280	48	2.1	550	940	1100	9.1	NCF2940V	SL182940
200	310	82	2.1	960	1530	1100	21.8	NCF3040V	SL183040
200	360	98	4	1420	2040	850	43.12	NCF2240V	SL182240
220	270	24	1.5	187	350	1100	2.8	NCF1844V	SL181844
220	300	48	2.1	570	1040	1000	9.9	NCF2944V	SL182944
220	340	90	3	1150	1810	1000	28.4	NCF3044V	SL183044
240	300	28	2	212	405	1000	4.4	NCF1848V	SL181848
240	320	48	2.1	600	1130	950	10.6	NCF2948V	SL182948
240	360	92	3	1210	1990	900	30.9	NCF3048V	SL183048
260	320	28	2	222	440	950	4.71	NCF1852V	SL181852
260	360	60	2.1	790	1460	900	18.5	NCF2952V	SL182952
260	400	104	4	1620	2550	800	44.5	NCF3052V	SL183052
280	350	33	2	305	600	850	7	NCF1856V	SL181856
280	380	60	2.1	920	1740	800	19.7	NCF2956V	SL182956
280	420	106	4	1660	2700	800	48	NCF3056V	SL183056
300	380	38	2.1	375	730	800	10	NCF1860V	SL181860
300	420	72	3	1180	2230	750	31.2	NCF2960V	SL182960
300	460	118	4	2040	3350	700	66.6	NCF3060V	SL183060
320	400	38	2.1	385	780	750	10.6	NCF1864V	SL181864
320	440	72	3	1220	2360	700	32.9	NCF2964V	SL182964
320	480	121	4	2090	3500	650	71.7	NCF3064V	SL183064
340	420	38	2.1	395	820	700	11.2	NCF1868V	SL181868
340	460	72	3	1260	2500	700	34.7	NCF2968V	SL182968
340	520	133	5	2490	4150	600	95.8	NCF3068V	SL183068
360	440	38	2.1	410	870	650	11.7	NCF1872V	SL181872
360	480	723	1	290	2650	650	36.4	NCF2972V	SL182972
360	540	134	5	2550	4350	550	101	NCF3072V	SL183072
380	480	46	2.1	570	1150	600	19.2	NCF1876V	SL181876
380	520	82	4	1670	3300	600	52.1	NCF2976V	SL182976

380	560	135	5	2650	4550	550	106	NCF3076V	SL183076
400	500	46	2.1	590	1220	600	20	NCF1880V	SL181880
400	540	82	4	1720	3500	550	54.3	NCF2980V	SL182980
400	600	148	5	3100	5500	500	140	NCF3080V	SL183080
420	520	46	2.1	600	1260	550	20.9	NCF1884V	SL181884
420	560	82	4	1750	3600	550	56.9	NCF2984V	SL182984
440	540	46	2.1	610	1320	550	21.8	NCF1888V	SL181888
440	600	95	4	2130	4200	500	78.1	NCF2988V	SL182988
460	580	56	3	790	1660	500	33.9	NCF1892V	SL181892
460	620	95	4	2160	4350	500	81.1	NCF2992V	SL182992
480	600	56	3	800	1720	500	35.2	NCF1896V	SL181896
480	650	100	5	2430	4900	480	94.7	NCF2996V	SL182996
500	620	56	3	820	1810	480	36.5	NCF18/500V	SL1818/500
500	670	100	5	2460	5100	460	98.3	NCF29/500V	SL1829/500

注： *表列为油润滑数值, 脂润滑为表列数值50%。