
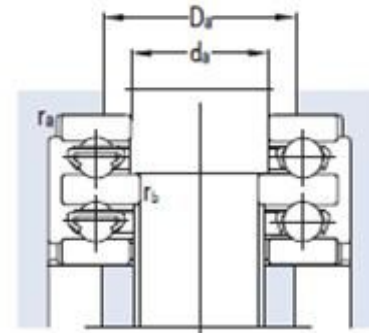


双向推力球轴承

Double direction Thrust ball bearing



基本尺寸Boundary Dimensions					基本额定载荷 Basic Load Ratings Dynamic Static		极限转速Limiting Speeds		轴承代号 Bearing Designations	其它尺寸 Other Designations		安装相关尺寸Mounting Dimensions				重量 Weight
d	D	H	r _{min}	r _{lmin}	C _r	C _{or}	脂润滑 Grease lubrication	油润滑 Oil lubrication		D ₁	B	d _{amin}	D _{amax}	r _{amax}	r _{bmax}	
100	170	68	1.1	1.1	137	430	2400	3000	52224	123	15	120	140	1	1	4.94
100	210	123	2.1	1.1	565	1420	2300	2800	52324	123	21	120	157	2	1	17.3
110	190	80	1.5	1.1	230	575	2000	2500	52226M	133	18	130	156	1.5	1	8.6
110	280	196	2	2	1020	2630	1600	2200	52428	279	44	276	197	2	2	56.8
120	200	81	1.5	1.1	365	1090	1300	1800	52228M	143	18	140	164	1.5	1	8.67
120	200	81	1.5	1.1	380	1140	1300	1800	52228	143	18	143	164	1.5	1	8.37

120	300	209	4	2	1100	2960	1000	1600	52430	154	46	151	211	4	2	70.3
130	215	89	1.5	1.1	425	1300	900	1400	52230	153	20	150	176	1.5	1	10.3
130	250	140	2.1	2.1	430	1020	800	1200	52330M	154	31	150	176	2	1	31.2
130	250	140	2.1	2.1	430	1020	800	1200	52330	154	31	150	176	2	1	29.4
140	225	90	1.5	1.1	430	1380	700	1000	52232M	163	20	160	186	1.5	1	11.8
140	225	90	1.5	1.1	430	1380	600	850	52232	163	20	160	186	1.5	1	11.7
150	250	98	1.5	2	760	3300	590	820	52236M	183	21	180	208	1.5	2	15.6
150	250	98	1.5	2	760	3300	520	800	52236	183	21	180	208	1.5	2	14.3
150	300	165	3	2	835	2780	520	800	52336	184	37	180	208	3	2	48.8
160	270	109	2	2	920	4080	500	760	52238	194	24	191	222	2	2	21.4
160	270	109	2	2	920	4080	500	760	52238J	194	24	191	222	2	2	20.9
170	280	109	2	2	910	4110	460	720	52240	204	24	201	232	2	2	22.1
170	340	192	4	2	1070	3730	430	680	52340	105	42	102	258	4	2	59.3
25	52	29	0.6	0.3	27.3	50	5000	6500	52206	32	7	30	39	0.6	0.3	0.261
30	62	34	1	0.3	37	73	4800	6000	52207	37	8	35	46	1	0.3	0.354
30	68	44	1	0.3	88.5	148	4800	6000	52307	37	10	35	48	1	0.3	0.674
30	68	36	1	0.6	47	102	4800	6000	52208	42	9	40	51	1	0.6	0.496
300	400	80	1.8	1.3	430	3240	350	550	52768	340	18	337	388	1.5	1	21.2
35	73	37	1	0.6	48	85	4000	5300	52209	47	9	45	56	1	0.6	0.623
40	78	39	1	0.6	54.5	114	4000	5300	52210	52	9	50	61	1	0.6	0.722
45	90	45	1	0.6	69	143	3800	5000	52211	57	10	55	69	1	0.6	1.06
45	120	87	1.5	0.6	191	385	3800	5000	52411M	57	20	53	81	1.5	0.6	4.87
469.5	570	84	2	2	365	2720	230	360	52794X	499	29	493	557	2	2	39.9
50	95	46	1	0.6	74	147	3800	5000	52212	62	10	60	74	1	0.6	1.25
55	100	47	1	0.6	75.5	160	3800	4800	52213	67	10	65	79	1	0.6	1.29
55	105	47	1	1	76.5	170	3800	4800	52214	72	10	64	102	1	1	1.37
55	125	72	1.1	1	148	315	3500	4500	52314	72	16	70	92	1	1	3.65
55	150	107	2	1	257	539	3500	4500	52414M	73	24	70	124	2	1	9.15
570	700	90	3	1.3	292	2150	200	320	527/615F 1	615	20	612	684	3	1	53.7
65	115	48	1	1	87.1	204	3200	4300	52216	82	10	80	94	1	1	1.73

65	180	128	1.1	1.1	545	1070	3200	4300	52417M	88	29	86	124	1	1	16
70	125	55	1	1	112	270	3200	4300	52217	88	12	85	101	1	1	2.19
75	135	62	1.1	1	133	320	3100	4200	52218	93	14	90	108	1	1	3.11
80	210	150	3	1.1	730	1550	3100	4100	52420M	103	33	101	145	3	1	25.3
80	210	150	3	1.1	685	1470	3100	4100	52420	103	33	101	145	3	1	24.4
85	150	67	1.1	1	163	340	3000	4000	52220	103	15	100	120	1	1	4.05
85	170	97	1.5	1	276	595	3000	4000	52320	103	21	100	128	1	1	8.81
90	230	166	3	1.1	795	1800	2900	3900	52422M	113	37	110	159	3	1	33.4
95	160	67	1.1	1	170	395	2800	3700	52222	113	15	110	130	1	1	4.51
95	190	110	2	1	305	590	2700	3500	52322M	113	24	110	142	2	1	13.2
95	190	110	2	1	305	590	2700	3500	52322	113	24	110	142	2	1	12.9
95	190	110	2	1	305	590	2700	3500	52322U	113	24	110	142	2	1	13.22
95	250	177	4	1.5	1380	4140	2600	3300	52424M	249	40	246	173	4	1.5	42.1