


# 双向推力角接触球轴承

## Double direction thrust angular contact ball bearing

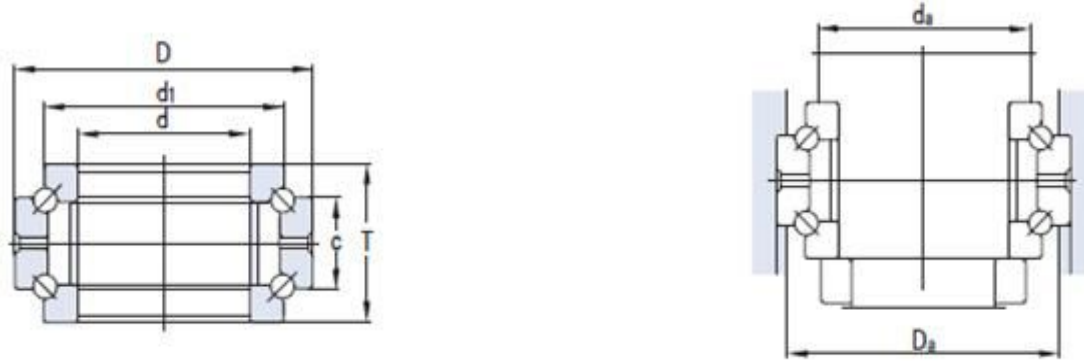

基本尺寸Boundary Dimensions						基本额定载荷 Basic Load Ratings Dynamic Static		极限转速Limiting Speeds		轴承代号 Bearing Designations	尺寸 Designations	安装相关尺寸Mounting Dimensions					重量 Weight
d	D	T	C	rmin	rlmin	Cr	Cor	脂润滑 Grease lubrication	油润滑Oil lubrication			d1max	damin	Damax	ramax	ralmax	
100	150	60	30	1.5	1	108	400	2900	3800	234420	133	119	142	1.5	0.3	3.19	
100	150	60	30	1.5	1	108	400	2900	3800	234420TN1	133	119	142	1.5	0.3	2.67	
100	140	48	24	1	0.6	71	281	3200	3800	234920/P4YAB	126	117	134	1	0.6	2.04	
105	160	66	33	2	0.6	109	200	2600	3500	234421/YA6	142	125	151	2	0.6	4.15	

105	145	48	24	1	0.6					234921	121					
110	170	72	36	2	0.6					234422	150					
110	150	48	24	1	0.6					234922	136					
120	180	72	36	2	0.6	139	265	2400	3200	234424	160	142	171	2	0.6	5.54
120	165	54	27	1	0.6					234924	150					
130	200	84	42	2	0.6	119	360	2200	3000	234426	177	143	192	2	0.6	8.64
130	180	60	30	1.5	1					234926	163					
1374.8	1597.03	247.65	49.23	5	3	3000	17300	500	800	2327/1374X4/H CEP5	1536.7	1395	1580	5	3	648
140	210	84	42	2.1	0.6	113	355	1800	2600	234428	187	166	200	2	0.6	8.97
140	210	84	42	2.1	0.6	113	355	1800	2600	234428/P4	187	166	200	2	0.6	8.97
140	210	84	42	2.1	0.6	113	355	1800	2600	234428/P5	187	166	200	2	0.6	8.97
140	190	60	30	1.5	1					234928	173					
150	225	90	45	2.1	0.6	250	390	1900	2500	234430/P4YAB	200	178	213	2	0.6	12.5
150	210	72	36	2	1	151	320	1800	2400	234930	190	172	200	2	1	7.26
160	240	96	48	2.1	1.1	241	680	1700	2300	234432	212	190	227	2	0.6	14
160	240	96	48	2.1	1.1	241	680	1700	2300	234432/P4YAB	212	190	227	2	0.6	14
160	240	84	36	2.1	1.1	132	445	1700	2300	234432X2	212	190	227	2	0.6	11.6
160	240	96	48	2.1	1.1	241	680	1700	2300	234432YA6	212	190	227	2	0.6	14
160	220	72	36	2	1					234932	200					
170	260	108	54	2.5	1.3	287	590	1600	2100	234434	230	206	245	2	1	18.5
170	230	72	36	2	1					234934	210					
180	280	120	60	2.1	0.6	216	585	2000	3000	234436	248	221	263	2.1	0.6	23.4
180	280	120	60	2.1	0.6	280	665	1500	2000	234436/P4YAB	248	230	270	2	1	24.8
180	280	120	60	2.1	0.6	280	665	1500	2000	234436/SP3	248	230	270	2	1	24.8
180	250	84	42	2	1					234936	227					
190	290	120	60	2.1	0.6	224	630	1900	2800	234438/P4YAB	258	231	273	2.1	0.6	24.7
190	260	84	42	2	1	150	625	2300	3300	234938/P5YB2	237					12
200	310	132	66	2.1	0.6	230	765	1300	1700	234440	274	243	300	2	1	33.6
200	280	96	48	2	1					234940	252					
220	300	96	48	2	1	210	930	1200	1700	234944/P5W33	272	250	287	2	1	17

220	340	144	72	3	1	450	1890	1200	1600	234444	304	265	330	2	1	43.9
240	320	96	48	2	1	270	1280	900	1300	234948	292	253	310	2	1	19.7
240	360	144	72	3	1	300	1090	1100	1500	234448	322	287	350	2.5	1	46.7
260	360	120	60	2.1	1.1	315	1390	1000	1400	234952/P4	326	300	344	2	1	33.7
280	380	120	60	2	1	232	955	1000	1400	234956	348	323	365	2.5	1	44.9
280	420	164	82	3	1.5	390	1270	1300	1800	234456	374	337.5	394.5	4	1.5	69
300	460	190	95	3	1.5					234460	406					
300	420	144	72	3	1					234960	384					
420	620	236	118	5	2	590	2980	900	1200	234484/P4	552	441	607	5	2	222
460	680	256	128	6	2	665	3500	800	1000	234492/SP	608	485	667	6	2	291
50	80	38	19	1	0.15					234410	70					
50	72	28	14	1	0.3					234910	64					
70	110	48	24	1.1	0.3	42.5	93	5300	7000	234414	97	86.5	103.5	1.1	0.3	1.49
75	115	48	24	1.1	0.3					234415	102					
75	105	38	19	1	0.5					234915	94					
80	125	54	27	1.1	0.3	52	120	4500	6000	234416	110	98.5	117	1.1	0.3	2.16
80	110	38	19	1	0.5					234916	99					
85	130	54	27	1.1	0.3					234417	115					
85	120	44	22	1	0.5					234917	106					
90	140	60	30	1.5	0.3	108	400	4000	5300	234418/SP5	123	110.5	130.5	1.5	0.3	2.99
90	125	44	22	1	0.6					234918	111					
95	145	60	30	1.5	0.3					234419	128					
95	130	44	22	1	0.6					234919	116					