


双列满装圆柱滚子轴承NNCL

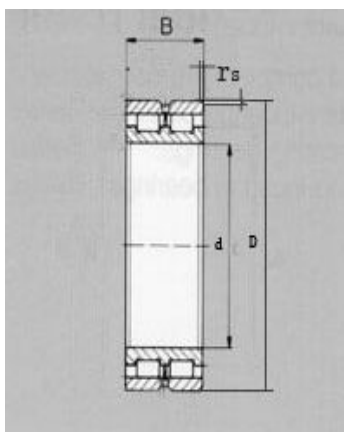

外型尺寸 (mm)			额定负荷 (KN)		重量(Kg)	极限转速 (r/min)	轴承代号	
d	D	B	Cr	Cor			INA	STON
60	85	25	67	115	0.47	4500	SL02 4912	NNCL 4912V
70	100	30	103	178	0.75	3800	SL02 4914	NNCL 4914V
80	110	30	109	199	0.85	3400	SL02 4916	NNCL 4916V
90	125	35	149	280	1.3	3000	SL02 4918	NNCL 4918V
100	140	40	191	370	1.9	2700	SL02 4920	NNCL 4920V
110	150	40	198	400	2.1	2500	SL02 4922	NNCL 4922V
120	165	45	222	440	2.85	2300	SL02 4924	NNCL 4924V
130	180	50	260	510	3.8	2100	SL02 4926	NNCL 4926V
140	190	50	270	550	4.1	2000	SL02 4928	NNCL 4928V
150	190	40	231	530	2.8	1900	SL02 4830	NNCL 4830V
150	210	60	410	820	6.45	1800	SL02 4930	NNCL 4930V
160	220	60	425	880	6.8	1700	SL02 4932	NNCL 4932V
170	215	45	260	600	3.95	1700	SL02 4834	NNCL 4834V
170	230	60	435	930	7.1	1600	SL02 4934	NNCL 4934V
180	225	45	270	640	4.15	1600	SL02 4836	NNCL 4836V
180	250	69	570	1200	10.5	1500	SL02 4936	NNCL 4936V
190	240	50	310	730	5.45	1500	SL02 4838	NNCL 4838V
190	260	69	580	1270	10.9	1400	SL02 4938	NNCL 4938V
200	250	50	320	770	5.7	1400	SL02 4840	NNCL 4840V
200	280	80	690	1480	15.3	1400	SL02 4940	NNCL 4940V
220	270	50	335	840	6.2	1300	SL02 4844	NNCL 4844V
220	300	80	720	1590	16.7	1200	SL02 4944	NNCL 4944V
240	300	60	500	1230	9.9	1200	SL02 4848	NNCL 4848V
240	320	80	740	1710	17.9	1200	SL02 4948	NNCL 4948V
260	320	60	530	1340	10.6	1100	SL02 4852	NNCL 4852V
260	360	100	1110	2490	31.2	1000	SL02 4952	NNCL 4952V
280	350	69	690	1790	15.6	1000	SL02 4856	NNCL 4856V
280	380	100	1150	2700	33.1	1000	SL02 4956	NNCL 4956V

300	380	80	820	2090	22	950	SL02 4860	NNCL 4860V
300	420	118	1650	3800	51.9	900	SL02 4960	NNCL 4960V
320	400	80	850	2240	23.5	900	SL02 4864	NNCL 4864V
320	440	118	1720	4100	54.9	850	SL02 4964	NNCL 4964V
340	420	80	870	2350	25	850	SL02 4868	NNCL 4868V
340	460	118	1770	4300	57.8	800	SL02 4968	NNCL 4968V
360	440	80	900	2500	26	800	SL02 4872	NNCL 4872V
360	480	118	1810	4500	60.8	750	SL02 4972	NNCL 4972V
380	480	100	1310	3450	44	750	SL02 4876	NNCL 4876V
380	520	140	2270	5600	90.5	700	SL02 4976	NNCL 4976V
400	500	100	1330	3600	45.8	700	SL02 4880	NNCL 4880V
400	540	140	2330	5900	94.6	700	SL02 4980	NNCL 4980V